



GALVANIZED STEEL FOUNDATION SLEEVES

The most common type of flagpole installation is the in-ground foundation sleeve method which calls for 1' of the flagpole to be encased in the ground sleeve for each 10' of exposed flagpole height. The diameter of the sleeve should be at least 2" greater than the outside diameter of the flagpole with the area between the flagpole and the sleeve filled with dry sand. Sleeves with a 6" diameter are supplied with a base plate and grounding spike. Sleeves with a diameter of greater than 6" are supplied with a base plate, support plate, grounding spike and, for ease of vertical alignment, steel centering structure welded to the inside of the base plate. If you require other sizes than listed or have special on-site conditions please contact us.

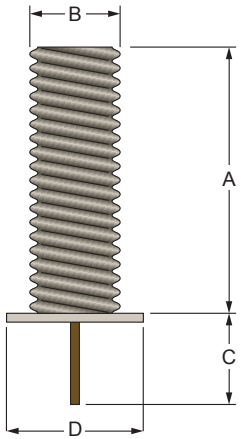

WITH BASE PLATE & GROUND SPIKE

ITEM #	A	B	C	D	1-5	6+	LBS.
380000	2'	6"	6"	8"	\$100	\$93	20
380002	3'	6"	6"	8"	120	116	24

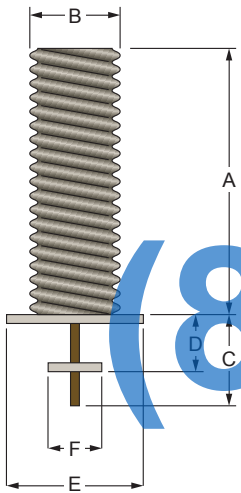

WITH BASE PLATE, SUPPORT PLATE, GROUNDING SPIKE & STEEL CENTERING STRUCTURE

ITEM #	A	B	C	D	E	F	1-5	6+	LBS.
380003	3'	8"	18"	6"	12"	6"	\$169	\$155	30
380004	3-1/2'	8"	18"	6"	12"	6"	173	160	32
380005	3'	10"	18"	6"	16"	8"	183	172	37
380006	3-1/2'	10"	18"	6"	16"	8"	195	186	44
380007	4'	12"	18"	6"	16"	8"	263	251	55
380196	4-1/2'	12"	18"	6"	16"	8"	282	266	60
380008	5'	12"	18"	6"	18"	9"	309	293	70
380009	5'	15"	18"	6"	20"	10"	548	519	86
380010	6'	15"	24"	10"	20"	10"	632	604	122
380011	6'	18"	24"	10"	24"	12"	702	666	135
380012	7'	15"	24"	12"	24"	12"	702	666	141
380013	7'	18"	24"	12"	24"	12"	814	773	156
380014	8'	18"	24"	12"	24"	12"	869	828	160

PVC SLEEVES

Poles slip into form fit sleeves snugly - no voids to fill with sand. Standard sleeves require wood wedges & sand for a proper installation.



ITEM #	FOR POLE DIA.	LEN.	TYPE	1-5	6+	LBS.
380015	1-3/8"	12"	FORM FIT	\$7.90	\$7.00	.14
380016	1-5/8"	15"	FORM FIT	9.30	8.50	.20
380017	1-3/4"	20"	FORM FIT	10.90	9.80	.26
380018	2"	15"	FORM FIT	14.10	12.50	.25
380020	2"	20"	FORM FIT	15.30	14.10	.34
380021	2-1/2"	30"	FORM FIT	20.40	19.20	1.1
380022	3"	20"	FORM FIT	25.10	23.80	.95
380023	3"-3 1/2"	24"	STANDARD	22.10	21.00	1.6
380024	3"-3 1/2"	30"	STANDARD	30.30	29.30	1.9


SLEEVES FOR FIBERGLASS FLAGPOLES



ITEM #	LENGTH	DIAMETER	1-5	6+	LBS.
380025	18"	6.3"	\$40	\$38	1.1
380026	24"	5"	55	51	1.4
380027	36"	8"	114	103	4.4
380029	48"	8"	145	131	6.2
380030	60"	14"	416	377	18
380031	72"	14"	533	479	27
380032	84"	21"	1,158	1,082	34

GALVANIZED STEEL ANCHOR BOLTS

For Shoe Base Installations

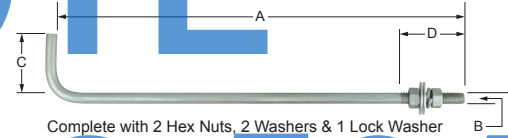

Complete with 2 Hex Nuts, 2 Washers & 1 Lock Washer

ITEM #	A	B	C	D	1-5	6+	LBS.
380037	16"	5/8"	3-1/2"	4"	\$29	\$27	2.4
380038	24"	3/4"	4"	5"	30	28	3.5
380039	36"	1"	4"	6"	49	47	8.4
380040	40"	1"	4"	6"	58	56	9.0
380041	54"	1-1/4"	6"	8"	149	135	29

COPPER CLAD LIGHTNING KIT

Each kit contains 5' long by 1/2" diameter copper clad rod, one 3' long by 1/2" diameter copper wire plus one connecting bracket.



COMPLETE SET

ITEM #	1-5	6+	LBS.
380033	\$138	\$124	4.5

5' x 1/2" ROD ONLY

ITEM #	PRICE	LBS.
380035	\$77	1.2

WIRE ONLY

ITEM #	PER FOOT	LBS.
380034	\$10.50	.36

BRACKET ONLY

ITEM #	1-5	6+	LBS.
380036	\$42	\$39	.36